




TECTONIC LED CORP.


ISO 9001:2000 Products RoHs Compliance

Spot Light
Hurricane Spot Light Series


Dimensions

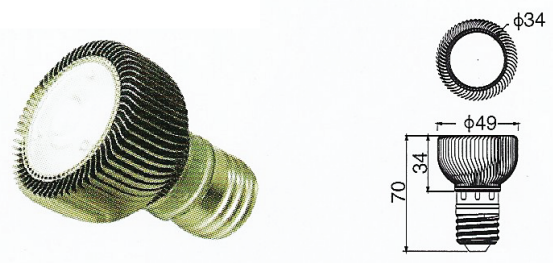


TT-E27A-1*3W-W-220

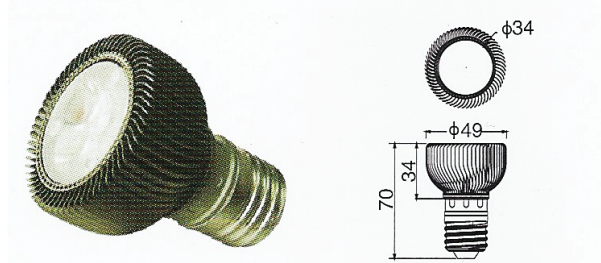


TT-E27A-3*1W-W-220
TT-E27A-3*2W-W-220

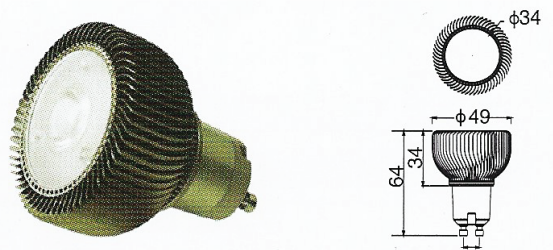


TT-GU10A-1*3W-W-220

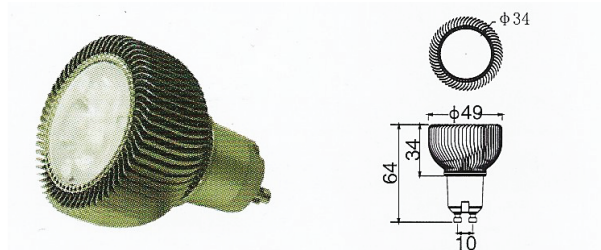

TT-GU10A-3*1W-W-220
TT-GU10A-3*2W-W-220

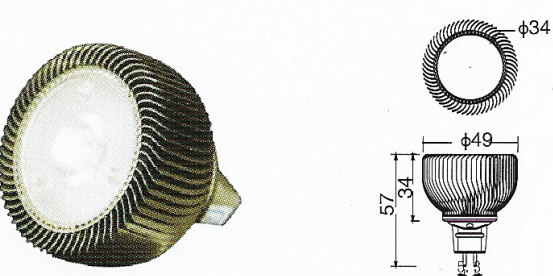

TT-MR16A-1*3W-W-12

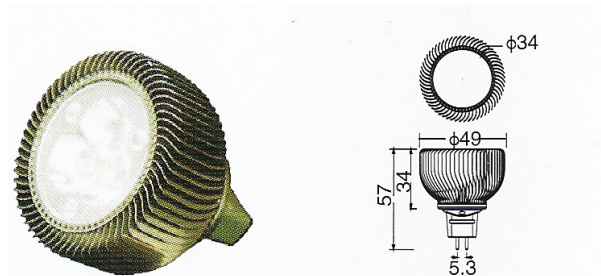

TT-MR16A-3*1W-W-12
TT-MR16A-3*2W-W-12

Technique Parameters

Base	Part No.	Input voltage(V)	Current(mA)	Power(W)	Color	Lumens(LM)	Illuminance(lux/m)
E27	TT-E27A-1*3W-W-220(CREE)	180-264	16	3.6	W	130	300
	TT-E27A-3*1W-W-220 (EDS)	180-264	20	3.6	W	180	380
	TT-E27A-3*2W-W-220(CREE)	180-264	23	5	W	270	480
GU10	TT-GU10A-1*3W-W-220(CREE)	180-264	16	3.6	W	130	300
	TT-GU10A-3*1W-W-220 (EDS)	180-264	20	3.6	W	180	380
	TT-GU10A-3*2W-W-220(CREE)	180-264	23	5	W	270	480
MR16	TT-MR16A-1*3W-W-220(CREE)	DC12V/AC12V	250	3.6	W	130	300
	TT-MR16A-3*1W-W-220 (EDS)	DC12V/AC12V	250	3.6	W	180	380
	TT-MR16A-3*2W-W-220(CREE)	DC12V/AC12V	410	5	W	270	480

CCT:5000-7000K Input:AC 90-264V IP rank:IP50

